Date: September 7, 2000

Box Patent Application ASSISTANT COMMISSIONER OF PATENTS Washington, D. C. 20231

Sir:

Transmitted herewith for filing is a patent application of

Inventor(s): Ian R. McLean

Case Docket No. _60,426-047

For: TUNED HELMHOLTZ RESONATOR USING CAVITY FORCING

Enclosed are:

- X 1 sheet of drawings Formal X Informal
- X An Assignment of the invention to Siemens Canada Limited
- ___ A certified copy of a _____ application.
- X A Combined Declaration and Power of Attorney
- ___ An associate power of attorney.
- ___ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ___ PTO Form 1449 with copies of patents cited in specification. (IDS).
- X This application claims priority to Provisional Application No. 60/154,391 which was filed on September 16, 1999

The filing fee has been calculated as shown below:

	No. Filed	No. Extra	Small Entity		Large Entity		
Basic Fee			\$345		\$690	\$690	
Total Claims	20-20		X 9	\$	X 18	\$	
Indep. Claims	3-3		X 39	\$	X 78	\$	
Multiple Dep. Claim(s) Present					\$		
			TOTAL		TOTAL	\$690	

- Please charge my Deposit Account No. 50-1482 in the amount of \$ A duplicate copy of this sheet is enclosed.
- X Checks in the amount of \$690.00 to cover the filing fee and \$40.00 for the Assignment Recordation are enclosed. A duplicate copy of this sheet is enclosed.
- X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-1482. A duplicate copy of this sheet is enclosed.
- ___ Any additional filing fees required under 37 CFR 1.16.
- X. Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

Registration No. 44,130

400 West Maple Road, Suite 350

Birmingham, MI 48009

(248) 988-8360

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"EXPRESS MAIL" Mailing Label No. EL692367951US. Date of Deposit September 7, 2000 I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Box Patent Application, Washington, D. C. 20231.

Δ

09/656808

The state of the s

20

25

5

10

TUNED HELMHOLTZ RESONATOR WITH CAVITY FORCING

BACKGROUND OF THE INVENTION

This invention relates to a noise attenuation device for an air induction system, more particularly, the invention relates to a Helmholtz resonator for producing a forced response.

Internal combustion engines produce undesirable induction noise which adversely affects the output torque and volumetric efficiency of the engine. The induction noise produced by the engine depends on the particular engine configuration and is affected by such factors as the number of cylinders, the volume and shape of the intake manifold plenum and intake runners, and other induction system parameters. The induction noise is caused by a pressure wave that travels away from the combustion chamber toward the inlet of the air induction system. The induction noise may be reduced and the engine performance improved by producing a wave traveling in the direction of the combustion chamber 180° out of phase of the noise wave. To this end, noise attenuation devices have been developed.

A Helmholtz resonator is one widely used noise attenuation device. The Helmholtz resonator produces a pressure wave that counteracts primary engine order noise waves, which have the greatest negative impact on engine performance. Helmholtz resonators typically provide a passive response targeted at a particular band width of noise. Because the Helmholtz resonator typically provides a passive response, losses occur which decrease the overall effectiveness of the resonator by producing a pressure wave having a narrower bandwidth and smaller amplitude than desired. Variable Helmholtz resonators have been developed, which vary the volume of the resonator to vary the band width at which the resonator attenuates noise. However, these variable resonators do not address the passive losses associated with the Helmholtz resonator. Accordingly, it is desirable to widen the band width of a Helmholtz resonator to further attenuate noise and increase the performance of the engine.

10

15

20

25

SUMMARY OF THE INVENTION AND ADVANTAGES

The present invention provides a Helmholtz resonator including a chamber at least partially defining a cavity. The chamber has a neck which defines a passage that is in fluid communication with the cavity. The chamber and the neck produce a passive response to a sound wave produced by the internal combustion engine. The sound wave negatively effects engine performance. An active resonator is disposed within the chamber. The active resonator produces a forced response for supplementing the passive response and increasing the band width of the noise attenuating pressure wave.

The Helmholtz resonator is in fluid communication with a portion of an air induction system that defines a passageway that carries the sound wave. A driver is connected to the active resonator, which is preferably a loud speaker, to drive the loud speaker and produce the forced response. The driver preferably utilizes a signal source, such as an engine speed signal, to synchronize the forced response with the engine speed. A phase compensator synchronizes the forced response with the sound wave, and an amplifier amplifies the signal to drive the loud speaker.

Accordingly, the present invention increases the band width of the passive response of the Helmholtz resonator to more effectively attenuate noise and increase engine performance.

BRIEF DESCRIPTION OF THE DRAWINGS

Other advantages of the present invention can be understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

Figure 1 is a schematic view of an internal combustion engine and induction system of the present invention;

Figure 2 is a perspective view of the Helmholtz resonator of the present invention; and

20

25

5

10

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

An internal combustion engine 10 is shown in Figure 1. An air induction system 12 provides air to the engine 10 for mixture with fuel. The air/fuel mixture is burned in a combustion chamber. Air is provided from the atmosphere through an air intake 20 that feeds air through a filter box 18. The air travels along passageway 24 through a throttle body 16 which controls the amount of air that travels through the passageway 24 to the engine 10. The air is fed to an intake manifold 14 which then distributes the air to the combustion chambers through runners 15. During the combustion process noise pressure waves N are produced in the induction system 12 which reflect back into the combustion chambers and negatively effect engine performance.

A Helmholtz resonator 28 is shown in fluid connection with the passageway 24 to produce noise attenuating pressure waves which at least partially cancel the noise pressure waves N. Primary order engine noise, or the most undesirable engine noise, is related to the speed of the engine. Helmholtz resonators are designed to attenuate noise at the primary order. The frequency at which the primary order engine noise occurs is: number of cylinders/2 x engine speed/60.

The Helmholtz resonator which is shown in Figure 2 includes a chamber 30 defining a cavity 32. A neck 34, which is shown as a tubular structure, extends from the chamber 30 and is in fluid communication with the cavity 32. The volume defined by the cavity 32 and the area of the neck 34 largely effect the band width of the noise attenuating frequency. The Helmholtz resonator 28 produces a passive response R_p that is approximately 180° out of phase from the noise wave N, shown in Figure 3. The passive response R_p has a bandwidth narrower and an amplitude smaller than desired.

20

25

5

10

The resonator 28 is shown arranged between the throttle body 16 and the intake manifold 14. However, it is to be understood that the resonator 28 may be arranged anywhere along the induction system 12. Preferably, the resonator 28 is arranged between the throttle body 16 and the intake manifold 14 because the largest portion of the noise pressure wave is reflected from the throttle body 16 back to the intake manifold 14. With the resonator 28 arranged as shown in Figure 1, a larger portion of the noise pressure wave may be attenuated by the resonator 28.

The present invention increases the band width of the resonator 28 by producing a forced response R_f shown in Figure 3. The forced response supplements the passive response R_p and together provide a wider band width and higher amplitude than the passive response from the Helmholtz resonator 28. As a result, a larger portion of the noise pressure wave may be attenuated. To this end, the present invention utilizes a active resonator, preferably a loud speaker 38, to produce the forced response. The chamber 30 includes a flange 36 to which the loud speaker 38 is attached. The flange 36 has an opening within which the loud speaker diaphragm 40 is disposed. The loud speaker 38 is driven by a driver 50 that drives the diaphragm 40 to produce a pressure wave that supplements the passive response pressure wave R_p. That is, the forced response R_f is in phase with the passive response R_p. The flange 36 includes pressure equalization ports 42 that equalizes the pressure on either side of the flange 36 to permit consistent operation of the resonator 28 of the present invention in various altitudes and changing atmospheric pressures. The equalization ports 42 are small enough to prevent pressure waves from exiting the cavity 32 through the equalization ports 42 so that the noise attenuating and pressure wave will not escape but will be directed to the noise wave. Preferably the pressure equalization ports 42 are about 1/8 inch in diameter.

Since the Helmholtz resonator 28 is designed to attenuate noise produced at the primary engine order, the driver 50 preferably includes a signal source 52 that senses the

then there is the track and the track arms arms arms are specified to the track arms and the track arms are specified to the track arms are track and the track arms are track arms are track arms.

5

10

speed of the engine. Such signals are commonly produced by proximeters that read notches on a timing gear. The speed signal is used by an ECU 58 for devices such as the tachometer and engine control. The signal source 52 is sent to a phase compensator 54 that adjusts the sinusoidal output from the signal source 52 so that it is approximately 180° out of phase with the noise pressure wave. The phase compensator 54 adjusts for such parameters as the speaker response, the volume response of the Helmholtz resonator, and the neck response of the Helmholtz resonator. These parameters may be determined through experimentation during the engine development process. An audio amplifier 56 amplifies the signal from the phase compensator 54 which is typically a low voltage signal. The signal from the audio amplifier 56 drives the loud speaker 38 to produce the forced response. The forced response R_f and passive response R_p , which are of wider band width and greater amplitude, are radiated back to the engine 10 to increase the engine performance.

While a branch Helmholtz resonator is shown it is to be understood that the present invention may also be used with an inline Helmholtz resonator. The invention has been described in an illustrative manner, and it is to be understood that the terminology that has been used is intended to be in the nature of words of description rather than of limitation. Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is, therefore, to be understood that within the scope of the appended claims the invention may be practiced otherwise than as specifically described.

20

15

CLAIMS

5

10

What is claimed is:

A Helmholtz resonator comprising:
 a chamber at least partially defining a cavity;

a neck in said chamber and having a passage in fluid communication with said cavity, said chamber and neck producing a passive response to a sound wave; and

an active resonator disposed within said chamber, said active resonator producing a forced response for supplementing said passive response.

- 2. The Helmholtz resonator according to claim 1, wherein said neck is a tubular structure extending from said chamber.
- 3. The Helmholtz resonator according to claim 1, wherein said active resonator is a loudspeaker.
- 4. The Helmholtz resonator according to claim 3, wherein said loudspeaker is a woofer.
- The Helmholtz resonator according to claim 3, wherein said chamber includes
 a flange with said loudspeaker supported thereon, and said loudspeaker having a diaphragm disposed within an opening in said flange for producing said forced response.
 - 6. The Helmholtz resonator according to claim 5, wherein said flange includes at least one pressure equalization port there through in fluid communication with said cavity.

15

Pok pir 1994

Į,

5

10

- 7. The Helmholtz resonator according to claim 6, wherein said flange is arranged opposite said neck.
- 8. An induction noise attenuation system for a combustion engine comprising:
 a portion of an air induction system defining a passageway carrying a sound wave;
 a Helmholtz resonator having a chamber at least partially defining a cavity and a neck
 in said chamber fluidly connecting said portion of said air induction system and said cavity,
 said chamber and said neck producing a passive response to said sound wave;

an active resonator disposed within said chamber; and

- a driver connected to said active resonator producing a signal for driving said active resonator and producing a forced response for supplementing said passive response.
- 9. The system according to claim 8, wherein said driver includes a signal source that detects a speed of the combustion engine for synchronizing said forced response relative to said speed.
 - 10. The system according to claim 9, wherein said signal source is engine RPM.
- 11. The system according to claim 9, wherein said driver includes a phase compensator for synchronizing said forced response approximately 180° out of phase with said sound wave.
 - 12. The system according to claim 9, wherein said driver includes an amplifier for amplifying a signal from said signal source.

And the first state of the first

15

20

10

- 13. The system according to claim 8, wherein said passageway is arranged between an intake manifold and a throttle body.
- 14. The system according to claim 8, wherein said active resonator is a loudspeaker.
 - 15. A method of attenuating noise in an induction system comprising:
 - a) sensing an engine speed;
 - b) producing a phase compensated engine speed signal;
 - c) driving a loudspeaker with the phase compensated engine speed signal; and
 - d) propagating a sound wave with the loudspeaker to attenuate the noise in the induction system.
 - 16. The method according to claim 15, further including the step of:
 - e) amplifying the engine speed signal.
 - 17. The method according to claim 15, further including the step of:
 - f) propagating a passive sound wave with a Helmholtz resonator, wherein step d) supplements the passive sound wave.
 - 18. The method according to claim 17, wherein step b) includes determining a loudspeaker response.
- 19. The method according to claim 17, wherein step b) includes determining a Helmholtz resonator cavity response.

20. The method according to claim 17, wherein step b) includes determining a Helmholtz resonator neck response.


5

10

TUNED HELMHOLTZ RESONATOR WITH CAVITY FORCING

ABSTRACT OF THE DISCLOSURE

A Helmholtz resonator includes a chamber at least partially defining a cavity. The chamber has a neck which defines a passage that is in fluid communication with the cavity. The chamber and the neck produce a passive response to a sound wave produced by the internal combustion engine. The sound wave negatively effects engine performance. An active resonator is disposed within the chamber. The active resonator produces a forced response for supplementing the passive response and increasing the band width of the noise attenuating pressure wave. The Helmholtz resonator is in fluid communication with a portion of an air induction system that defines a passageway that carries the sound wave. A driver is connected to the active resonator, which is preferably a loud speaker, to drive the loud speaker and produce the forced response. The driver preferably utilizes a signal source, such as an engine speed signal, to synchronize the forced response with the engine speed. A phase compensator synchronizes the forced response with the sound wave, and an amplifier amplifies the signal to drive the loud speaker.

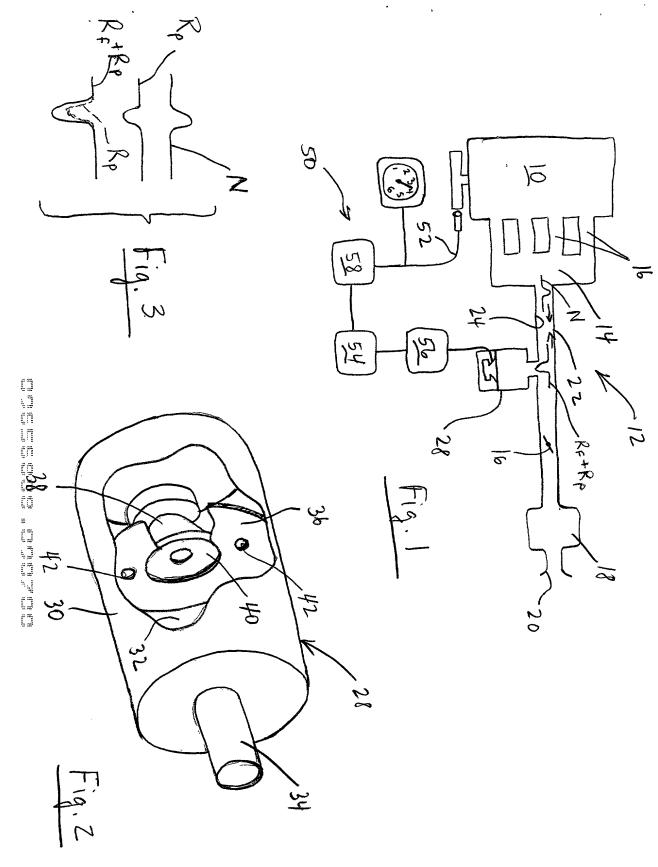

Please type	e plus	sion	(+)	โกรได้ส	this box	→	1+1

PTO/SBIO1 (12-97)

Approved for use (hrough 8/30/00, OMB 0651-0032

Patent and Trademark Critica; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1805, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

	~ .			******						15	
DE	CLA	RATIC	<u> </u>	- Utilit	yor	Desig	n Pa	tent.	App	licati	on
IN NORTH WIT	JUGA ES TOP	ifit under 35 U.S. ca, listed below itemstionel appl storial to patant International M	PERMIT BY	defined in 37 (JFK 1.58 W	ullan(s), or i of each of or first purac hich became	365(c) of any the ciplms i reph of 35 (a avollable t	y PCT Intern of this appli J.S.C. 112, Delwaon the	national a cation la i acknow i filing da	pplication de not disclose ledge the du le of the pri	sionating the d in the prior ly to discisso a application
U.	s. Par	ent Applicat Num		PCT Paren	t		Filing Da			nt Patont If applica	
		-	•	•		,			,	,	
Lanobleba	U.S. or	PCT Internations	l applicat	TON NUMBER IN	n Detell at	a antible pres	iul priority o	lata shoel P	TO/SB/Q	26 etteched	hurula,
As a named inv	rethor, it	ereby appoint t	a lollowir	ng regiztered p	recultoneris) to prosecu	le lhie appli	ation and t	P RAUPAC		
dua Madeliere		innected there		OB.					>	Place Cus Number Ba Label h	r Code
			- '-'		trailon	namo/#+platr			· 7 —	Reg	atration
Iaura N	Name				1 <u>D</u> @F	61-2		Brac	3~5.		smbar EEG
Adel A.			.	35,363 29,606				Canar		32,	. 1
I. Marc			-	37,274				Codis			
	- ~	,,11									
Additional of	-distant	practitioner(a)	named ot	auoplemental	Registered	Prediforar	Information	Shoot PTO	/88/0ZC	altected her	oto,
Direct #11 corr	espond	ence lo:		er Number ode Label			O	R 🖭 C	опеерог	dence add	icoze pelom
Name	El	a Kell	er !	<i>-</i>					•		
Arichtens	SIE	MENS COF	PORA:	PION							·
Address	186	Wood Av	enrie	South:					, ,		
City	Bal	lin	• •			State	W	ZIP	088	30	
Country	US			Telephon	732	321 3	024	Fax	732	321 30	14
punishable by	time or it	l statements ma d further that th applicament, or t justed thereon	both, un	n of my own k ments were m der 18 U.S.C.	nowledge a ede with the 1001 and	ital ency A la knowledg ie kno bug	that all sta a that williu likul false di	tomence mis I false state Latemente r	nay Joodi Meura di Mara di Ma Mara di Mara di	formation are the like a	o made are didity of the
Name of Sc	ole of F	irst invento	r,	٠.		☐ A padl	pù yes pe	en filed fo	rthis un	יאנן מסטקוב	entor .
· G	Yen Na	ne (first end o	iddle lif	envl)		Family Name or Surname					
Ian R.					McLean						
inventor's Signature	<i>-</i>	lan		11/2						Date	7/9/00
Residence: C	-lty	Chathar	n	1.07	tario	Country	Car	ađa		Citizonanip	Carac
Post Office A	ddress	140 Pat	ck A	venue,	Apt,	104					
Post Office A	ರವಣಾ		 ,			·					
CID	_{ርጉ}	atbam	State (Ontari	ZIP	N7M_	3 V 6	Cou	nery (Canada	a]
D'Additional						, , , , , ,		a) sheetis)			

required)

Filing

7

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR I			Attorney Docket Nur	nber	99P7811/60,426-		
			First Named Invento		Ian R.		
			COMPLETE IF KNOWN				
			Application Number		/		
B Declaration			Filing Date	Her	ewith		
Declaration Submitted	nitted OR Submitted after Initial	Group Art Unit					
with Initial Filing	al Filing (surcharge (37 CFR 1.16 (e))		Examiner Name				

Examiner Name

As a below named inventor I has	aby declare that:								
As a below named inventor, I hereby declare that:									
My residence, post office address, and citizenship are as stated below next to my name.									
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:									
names are issue below) or the subject matter which is claimed and for which a patent is sought on the invention entitled:									
TUNED HELMHOLT	Z RESONA	TOR USING	CAVITY 1	FORCING					
the specification of which	(Title	e of the Invention)							
ls attached hereto OR	·	·							
was filed on (MM/DD/YYYY)		as Unit	ed States Applica	tion Number or PCT International					
Application Number	and w	as amended on (MM/DD/	νw. Γ.	(if applicable).					
I hereby state that I have reviewed a	nd understand the	contents of the above ide		· · · · · · · · · · · · · · · · · · ·					
amended by any amendment specific	cally referred to abo	ove.		, , , , , , , , , , , , , , , , , , , ,					
I acknowledge the duty to disclose in	formation which is	material to patentability as	defined in 37 CF	R 1.56.					
I hereby claim foreign priority benefit	e under 35 11 S C	119(a)-(d) or 365(b) of	any foreign applic	etion(s) for netent or inventor's					
certificate, or 365(a) of any PCT inte America, listed below and have also id	mational application	n which designated at le	ast one country	other than the United States of					
or of any PCT international application	having a filing date	e before that of the applic	ation on which pri	orlty is claimed.					
Prior Foreign Application		Foreign Filing Date	Priority	Certified Copy Attached?					
	Country	(MM/DD/YYYY)	Not Claimed	YES NO					
	•								
	•								
Additional facility and light to the state of the state o									
Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto: I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.									
Application Number(s) Filing Date (MM/DD/YYYY)									
	Additional provisional application								
numbers are listed on a									
			aumata	mantal ariarity data about					
60/154,391	Septemb	er 16, 199		emental priority data sheet SB/02B attached hereto.					

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

īñ

11. 11.12 11.12 11.13 11.13 11.13

27 40 ĘĢ

DECLARATION

REGISTERED PRACTITIONER **INFORMATION** (Supplemental Sheet)

		(outpromonal ontox)				
Name	Registration Number	Name	Registration Number			
Lawrence C. Edelman Mark H. Jay Rosa S. Kim Peter A. Luccarelli, Jr. Jeffrey P. Morris Donald B. Paschburg Darryl A. Smith Daniel J. Staudt Heather S. Vance	29,299 27,507 39,728 29,750 25,307 33,753 37,756 34,733 39,033	Pasquale Musacchio Eric C. Swanson Tracy L. Hurt John Musone	36,876 40,194 34,188 44,961			
Scott T. Weingaertner Robert A. Whitman Ira Lee Zebrak John E. Carlson David J. Gaskey William S. Gottschalk Kerrie A. Laba Theodore W. Olds David L. Wisz	37,756 36,966 31,147 37,794 37,139 44,130 42,777 33,080 46,350					
			•			
			·			
·		·				

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.